




PLAN

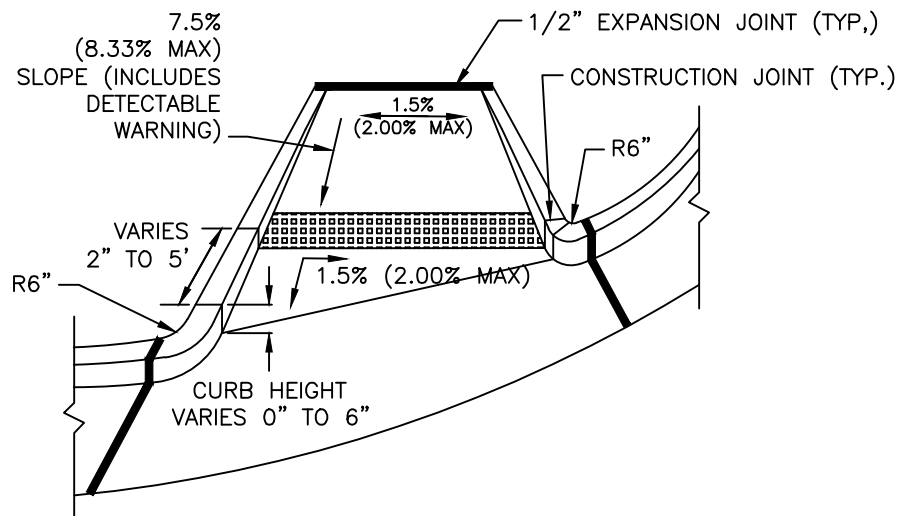

PERSPECTIVE

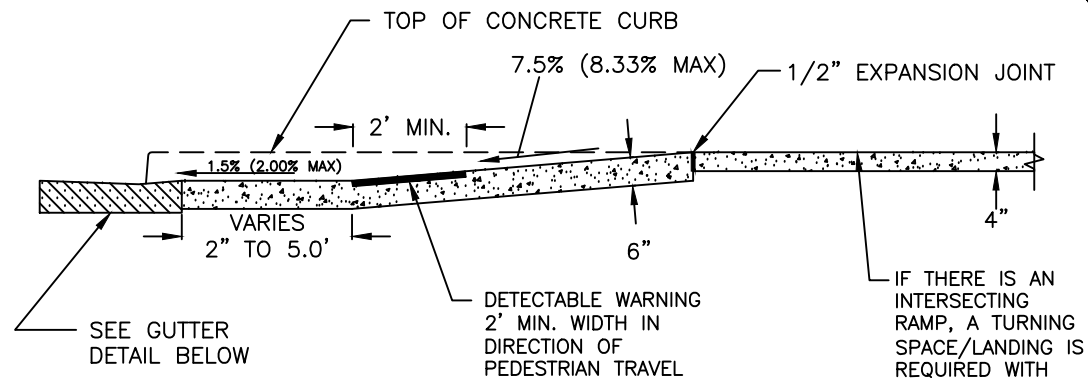

SECTION A-A

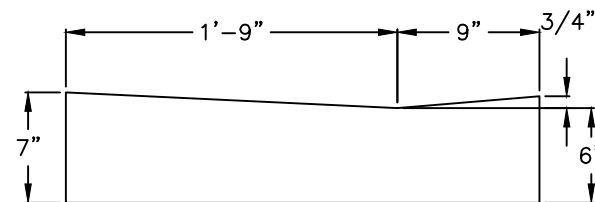

GUTTER DETAIL

NOTES:

- USE THIS DETAIL ONLY UNDER THE FOLLOWING CIRCUMSTANCES:
 - 5-FOOT SIDEWALKS WITH CURB RADII OF 35 FEET OR LESS
 - 6-FOOT SIDEWALKS WITH CURB RADII OF 30 FEET OR LESS
 - 8-FOOT SIDEWALKS WITH CURB RADII OF 25 FEET OR LESS
- DIRECTIONAL RAMPS MAY BE USED WHEN AN 8-FOOT PLANTING STRIP IS PROVIDED. DO NOT USE THIS DETAIL IF THERE IS HARDSCAPE INSTEAD OF A PLANTING STRIP.
- ALL CONCRETE SHALL BE AT LEAST 3600 PSI.
- ENSURE FLUSH CONDITIONS AT RAMP TO GUTTER TRANSITION.

THIS DETAIL IS NOT FOR USE IN ETJ, OR ON NCDOT-MAINTAINED STREETS.

NOT TO SCALE



CITY OF CHARLOTTE
LAND DEVELOPMENT STANDARDS

DIRECTIONAL CURB RAMP WITH SMALL/MEDIUM CURB RADII

STD. NO.	REV.
10.40A	14